

MAC.RO. SYSTEM - 500/550 ANCHOR BAR

CONTINUOUS THREADED BAR

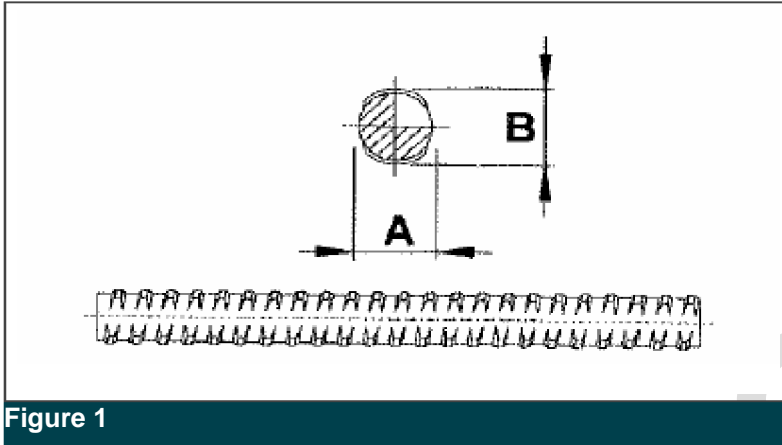


Figure 1

Figure 2

TIPO		20	25	28	32	40
Diameter A/B	mm	20/23	25/29	28/32	32/36	40/45
Tensile strength	N/mm ²	550	550	550	550	550
Yield stress	N/mm ²	500	500	500	500	500
Elongation	%	Min 10%	Min. 10%	Min. 10%	Min. 10%	Min. 10%
Yield point	kN	160	245	310	405	630
Tensile strength	kN	175	270	340	440	690
Cross area	mm ²	314	491	616	804	1260
Weight	kg/m	2,47	3.85	4.83	6.31	9.87
ACCESSORIES						
Coupling		36x105	40 x 115	45 x 125	52 x 140	65 x 180
Locking nut		36x40	41 x 45	46 x 50	50 x 60	65 x 80
Plate		150x150x8 plain	150 x 150 x 8 convex	150 x 150 x 10	200 x 200 x 10	200 x 200 x 10 convex

WARNING: Install the product in accordance with National Security Requirements! If the job is done with suspension or security ropes, personal protective equipment against fall risk must be connected with anchor points in agreement with EN 795.

Maccaferri reserves the right to amend product specifications without notice and specifiers are requested to check as to the validity of the specifications they are using.

Officine Maccaferri S.p.A.

Via Kennedy, 10 - 40069 Zola Predosa (BO) - Italy
 Tel. (+39) 051-6436000 - Fax (+39) 051-6436201
 E-mail: comes@maccaferri.com - Web site: www.officinemaccaferri.com

Bureau Veritas Certified Quality System Company with
 Accredia's and UKAS' s accreditation.